

☆: Recommendation products

: AEC-Q200 compliant. Please contact your local Chemi-Con office for more details, test data, information and also non indicated products.

125°C Super Low ESR and

High Temperature

PXH

PXD

105℃ Super Low ESR

HXD

Long Life


CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS

■ RESIN-MOLDED SURFACE MOUNT TYPE





■ SURFACE MOUNT TYPE




■ RADIAL LEAD TYPE




CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

■ SURFACE MOUNT TYPE










Digitalization

Super Low ESR Automotive

Application

ALUMINUM ELECTROLYTIC CAPACITORS

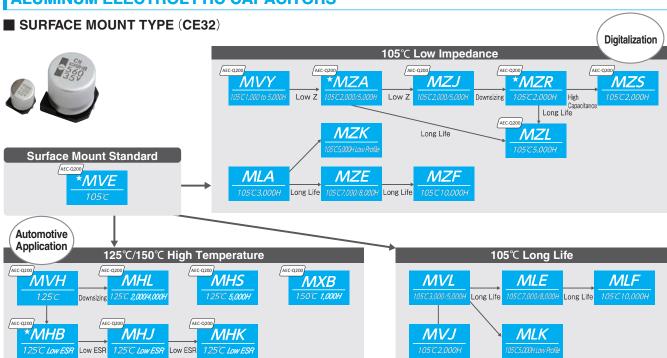




☆: Recommendation products

(AEC-Q200 compliant. Please contact your local Chemi-Con office for more details, test data, information and also non indicated products.


ALUMINUM ELECTROLYTIC CAPACITORS

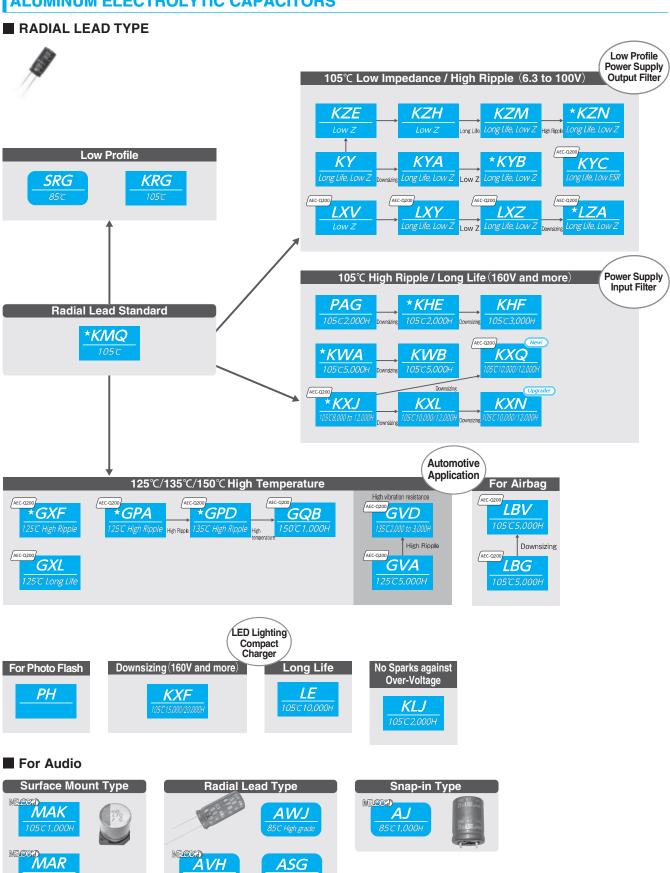

☆: Recommendation products

: AEC-Q200 compliant. Please contact your local Chemi-Con office for more details, test data, information and also non indicated products.

ALUMINUM ELECTROLYTIC CAPACITORS

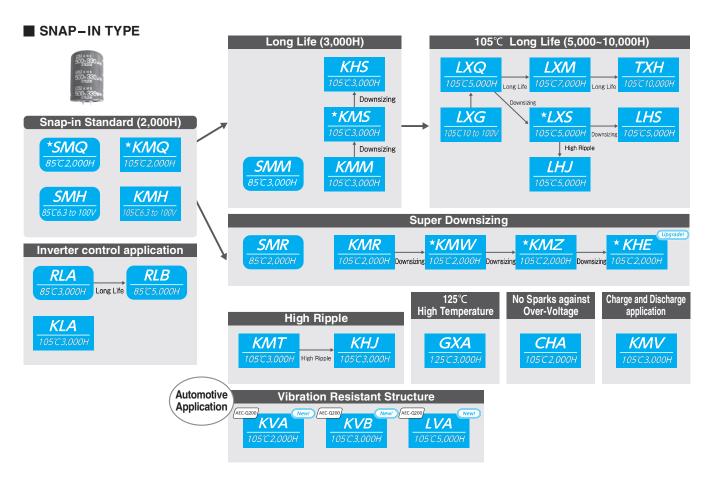

■ SCREW-MOUNT TYPE

